


REV.	ECN. NO.	APPD.

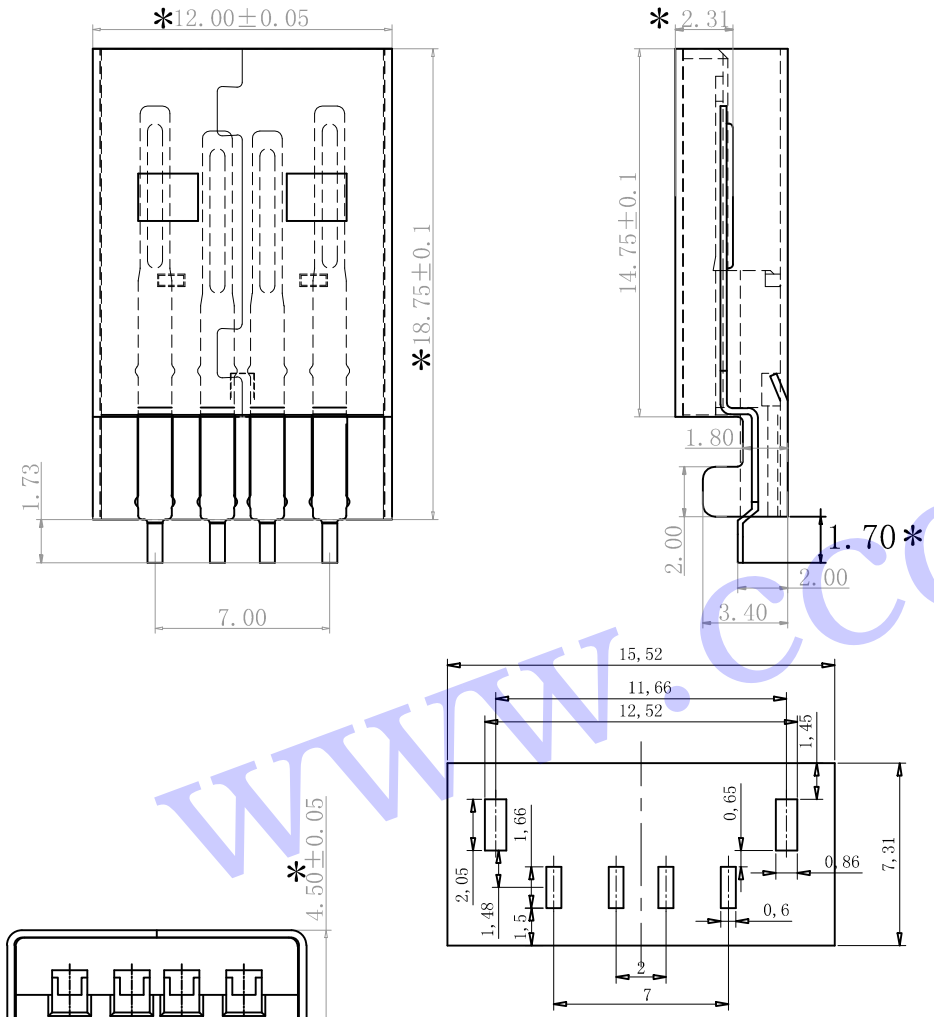

PCB LAYOUT

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
5. 绝缘阻抗: Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.75kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Matorial:

1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT/LCP White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

X.	±0.50	X.°	±2°	UNITS	/	
.X	±0.30	.X°	±1°	mm		
.XX	±0.10	.XX°	±0.5°	MAT'L		
.XXX	±0.05					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHUANGYUE TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHUANGYUE TECHNOLOGY CO., LTD					FINISH	/
					Q'TY	/

深圳市创粤科技有限公司

TITLE:
USB A公沉板2.5MM直脚无柱无孔 板上2.0MM

APPD:	陈俊杰
CHKD:	陈志南
DR:	林德成

DWG NO.:		
CY-GAM2-4P-250		
SCALE	SHEET	REV.
1/1	1/1	A1